


# 健全 C M Technology

## Amorphous Beads: DAYF030203A

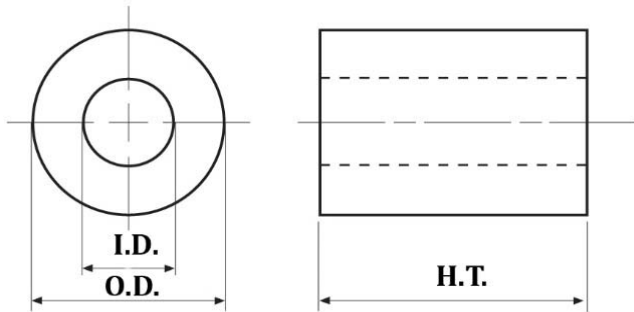


Core Dimension					Finished
O.D.	3.7	mm	±	0.5	4.2 max
	0.15	in	±	0.02	0.165
I.D.	2.0	mm	±	0.5	1.5 min
	0.08	in	±	0.02	0.06
H.T.	3.2	mm	±	0.5	4.0 max
	0.13	in	±	0.02	0.157

Flux @ 100KHz, 80 A/m 25°C (T)		
$\Phi_c$ ( $\mu$ Wb)	$B_s$	
3.07	1.2	
Currie Temperature	$T_c$	570 °C

Coating Material meets UL 94-V0  
UL File E320494

Mechanicals		
$L_e$	7.85	mm
	0.31	in
$A_e$	1.28	mm <sup>2</sup>
	0.050	in <sup>2</sup>
$V_e$	10.05	mm <sup>3</sup>
	0.40	in <sup>3</sup>

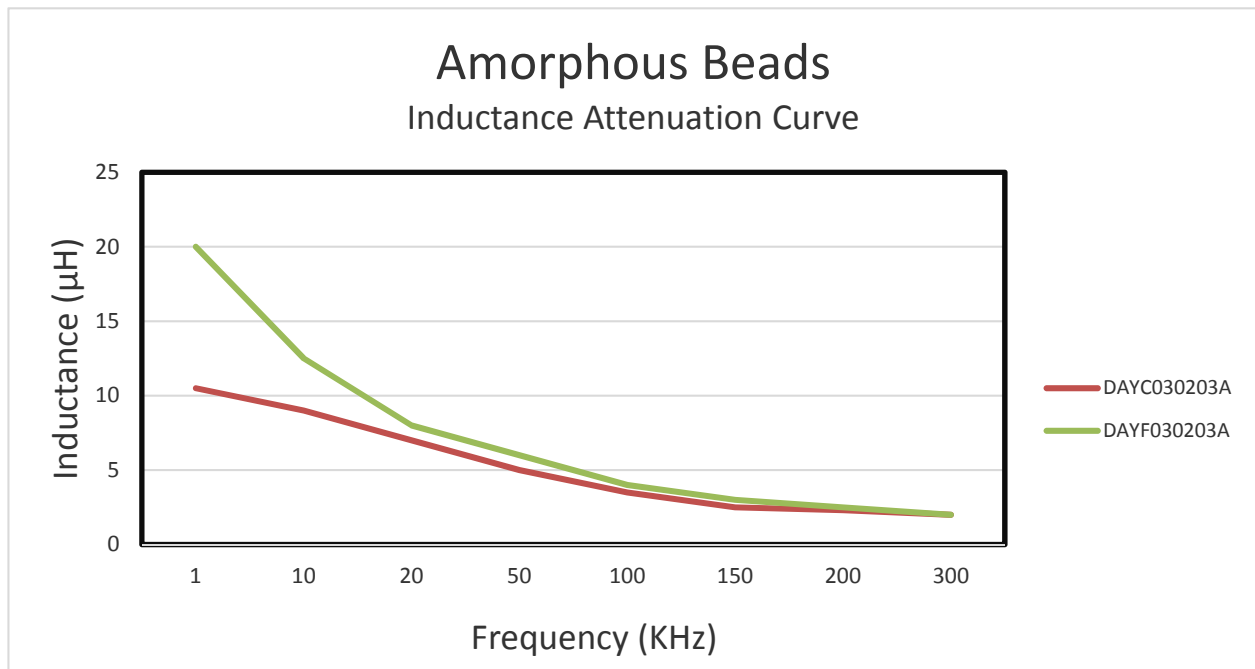

North America Master Distributor:

**MH&W International Corp**

575 Corporate Drive, Mahwah, NJ 07430

Phone: 201-891-8800 - Toll Free: 866-MHW-CORE

Email: sales@mhw-intl.com WEB: www.mhw-intl.com