


TP-US Series Ultra Soft Type Gap Filler

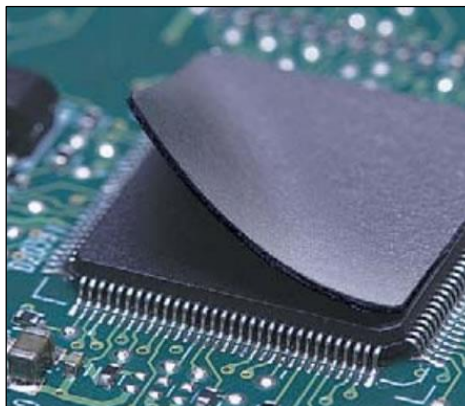

Properties	symbol	unit	TP-US10	TP-US15	TP-US20	TP-US25	TP-US30
Color			Black	Gray	Yellow	Purple	Light Gray
Thermal Conductivity	λ	W/mK	1.0	1.5	2.0	2.5	3.0
Dielectric Breakdown Voltage		kV	>5				
Volume Resistivity		Ωcm	$> 10^{12}$				
Thickness		mm	0.2 ~ 5.0			0.3 ~ 5.0	
Standard Size			210 x 297, 300 x 300				
Hardness			Shore A: 5 / Shore 00: 10				
Tensile Strength		MPa	>0.1				
Application Temperature		$^{\circ}\text{C}$	-60 to +200				
Flame class		UL94	V0 [File No.: E258204]				

DISCLAIMER: Purchaser shall be solely responsible for determining the adequacy of the product for any and all uses which the purchaser shall apply the product, and the application of the product by the purchaser shall not be subject to any implied warranty of fitness for that purpose