

Ferrite for Switching Power Supplies

RM cores

RM series

Issue date: April 2011

- All specifications are subject to change without notice.
 - Conformity to RoHS Directive: This means that, in conformity with EU Directive 2002/95/EC, lead, cadmium, mercury, hexavalent chromium, and specific bromine-based flame retardants, PBB and PBDE, have not been used, except for exempted applications.
-


Ferrite for Switching Power Supplies

RM Series


RM4 to RM14



Ordering Code System

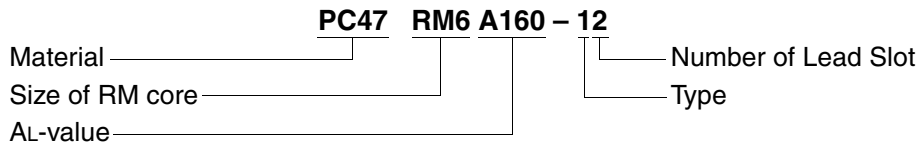

RM CORES

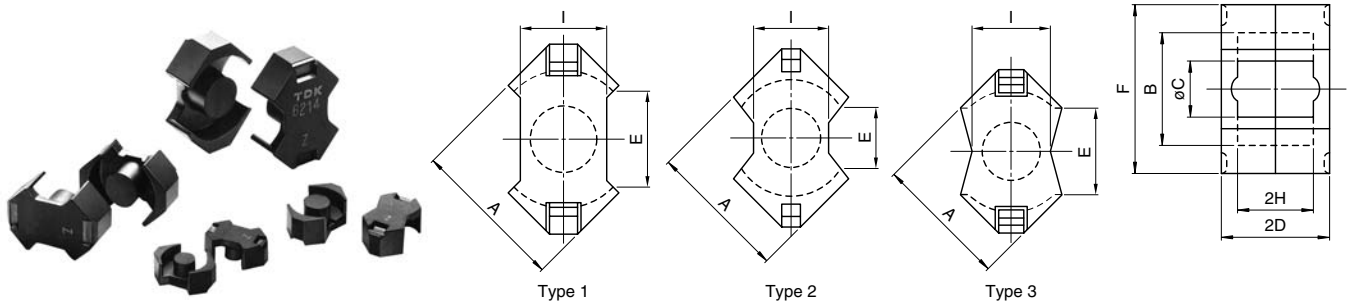


Part No.	Type	Dimensions in mm							
		A	B	øC	2D	E min.	F	2H	I
PC47RM4Z-12	1	9.63±0.18	8.15±0.2	3.8±0.1	10.4±0.1	5.8	10.8±0.2	7.2±0.2	4.45±0.15
PC47RM5Z-12	1	12.05±0.25	10.4±0.2	4.8±0.1	10.4±0.1	6.0	14.3±0.3	6.5±0.2	6.6±0.2
PC47RM6Z-12	3	14.4±0.3	12.65±0.25	6.3±0.1	12.4±0.1	8.4	17.6±0.3	8.2±0.2	8.0±0.2
PC47RM8Z-12	2	19.35±0.35	17.3±0.3	8.4±0.15	16.4±0.1	9.8	22.75±0.45	11.0±0.2	10.8±0.2
PC47RM10Z-12	2	24.15±0.55	21.65±0.45	10.7±0.2	18.6±0.1	11.3	27.85±0.65	12.7±0.3	13.25±0.25
PC47RM12Z-12	2	29.25±0.55	25.5±0.5	12.6±0.2	23.5±0.1	12.9	36.75±0.65	17.1±0.3	16.0±0.3
PC47RM14Z-12	1	34.2±0.5	29.5±0.5	14.75±0.25	28.8±0.2	17.0	41.6±0.6	21.1±0.3	18.7±0.3

Part No.	Effective parameter				Electrical characteristics		Core loss (W) max. 100kHz, 200mT, 100°C	Weight (g)
	C ₁ (mm ⁻¹)	A _e (mm ²)	ℓ _e (mm)	V _e (mm ³)	AL-value (nH/N ²)*			
					Without air gap	With air gap		
PC47RM4Z-12	1.62	14.0	22.7	318	680 min.	63±3% 100±3% 160±3%	0.11	1.7
PC47RM5Z-12	0.940	23.7	22.4	530	1250 min.	63±3% 100±3% 160±3%	0.17	3.0
PC47RM6Z-12	0.781	36.6	28.6	1050	2450±25%	100±3% 160±3% 250±3%	0.38	5.5
PC47RM8Z-12	0.594	64.0	38.0	2430	1950 min.	100±3% 160±3% 250±3%	0.91	13
PC47RM10Z-12	0.450	98.0	44.0	4310	4850±25%	160±3% 250±3% 400±3%	1.70	23
PC47RM12Z-12	0.406	140	56.9	7970	4150 min.	160±3% 250±3% 400±3%	3.00	42
PC47RM14Z-12	0.393	178	70.0	12500	4600 min.	160±3% 250±3% 400±3%	4.60	70

* AL-value: 1kHz, 0.5mA, 100Ts

RM Series RM4 Cores

Based on JIS C 2516, IEC Publication 60431 and DIN 41980.

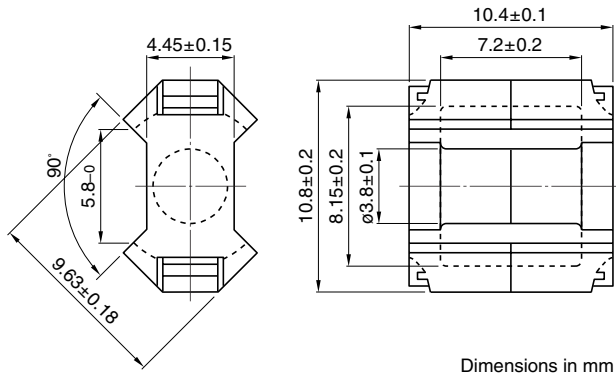

Dimensions in mm


PARAMETER

Core factor	C1	mm ⁻¹	1.62
Effective magnetic path length	ℓ_e	mm	22.7
Effective cross-sectional area	A_e	mm ²	14.0
Effective core volume	V_e	mm ³	318
Cross-sectional center pole area	A_{cp}	mm ²	11.3
Minimum cross-sectional center pole area	$A_{cp \text{ min.}}$	mm ²	10.7
Cross-sectional winding area of core	A_{cw}	mm ²	15.6
Weight (approx.)		g	1.7

Part No.	AL-value (nH/N ²)	Core loss (W) at 100°C 100kHz, 200mT	Calculated output power (forward converter mode)
PC47RM4Z-12	680 min. (1kHz, 0.5mA)* 1650 min. (100kHz, 200mT)	0.11 max.	8.4W (100kHz)


* Coil: ϕ 0.18 2UEW 100Ts

NI limit vs. AL-value for PC47RM4 gapped core (Typical)

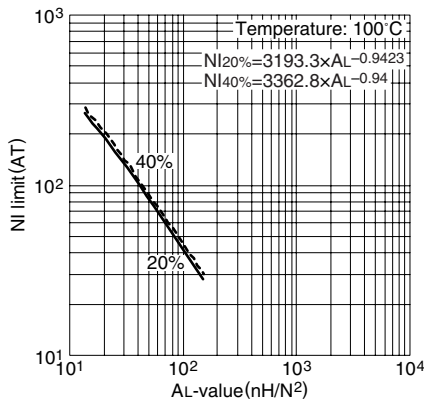

Note: NI limit shows the point where the exciting current is 20% and 40% away from its extended linear part.


AL-value vs. Air gap length for PC47RM4 core (Typical)

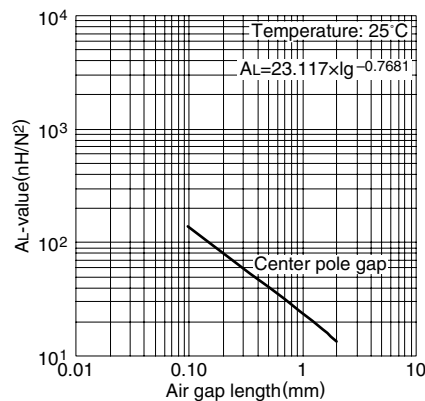


Measuring conditions

- Coil: ϕ 0.18 2UEW 100Ts
- Frequency: 1kHz
- Level: 0.5mA

Temperature rise vs. Total loss for RM4 core (Typical) (Ambient temperature: 25°C)

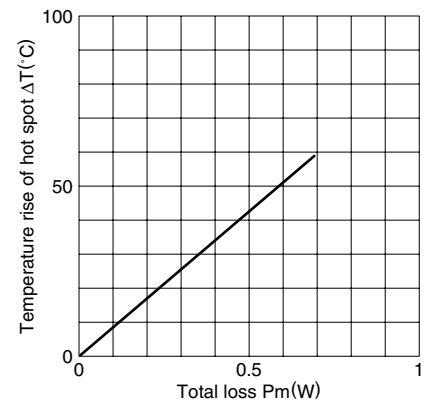


Note: The temperature rise is measured in the room whose temperature and humidity are fixed to 25°C and 45(%)RH, respectively. (approx. 400×300×300cm)



RM Series RM5 Cores

Based on JIS C 2516, IEC Publication 60431 and DIN 41980.

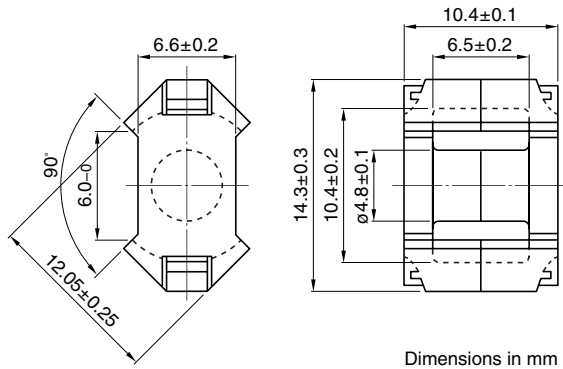


PARAMETER

Core factor	C1	mm ⁻¹	0.940
Effective magnetic path length	ℓ _e	mm	22.4
Effective cross-sectional area	A _e	mm ²	23.7
Effective core volume	V _e	mm ³	530
Cross-sectional center pole area	A _{cp}	mm ²	18.1
Minimum cross-sectional center pole area	A _{cp min.}	mm ²	17.3
Cross-sectional winding area of core	A _{cw}	mm ²	18.2
Weight (approx.)		g	3.0

Part No.	AL-value (nH/N ²)	Core loss (W) at 100°C 100kHz, 200mT	Calculated output power (forward converter mode)
PC47RM5Z-12	1250 min. (1kHz, 0.5mA)* 3340 min. (100kHz, 200mT)	0.17 max.	20.3W (100kHz)


* Coil: ø0.2 2UEW 100Ts

NI limit vs. AL-value for PC47RM5 gapped core (Typical)

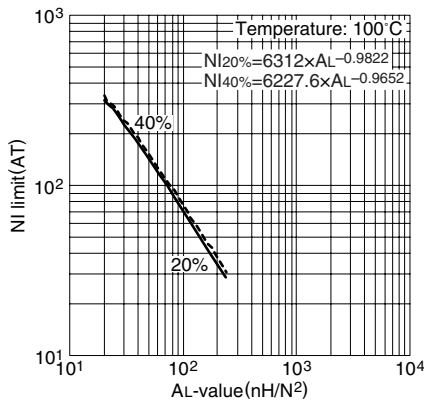


Note: NI limit shows the point where the exciting current is 20% and 40% away from its extended linear part.

AL-value vs. Air gap length for PC47RM5 core (Typical)

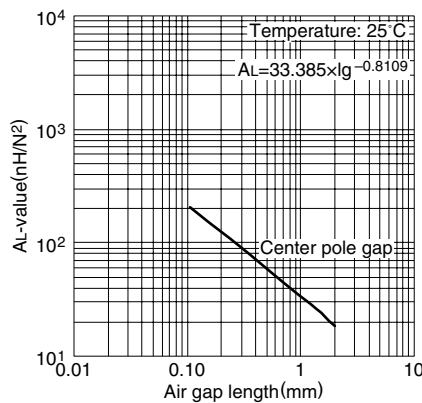


Measuring conditions • Coil: ø0.2 2UEW 100Ts
• Frequency: 1kHz
• Level: 0.5mA

Temperature rise vs. Total loss for RM5 core (Typical) (Ambient temperature: 25°C)

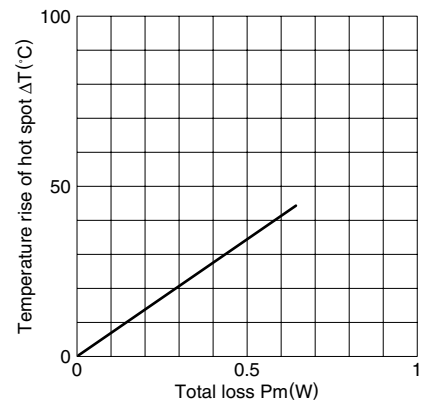


Note: The temperature rise is measured in the room whose temperature and humidity are fixed to 25°C and 45(%)RH, respectively. (approx. 400×300×300cm)



RM Series RM6 Cores

Based on JIS C 2516, IEC Publication 60431 and DIN 41980.

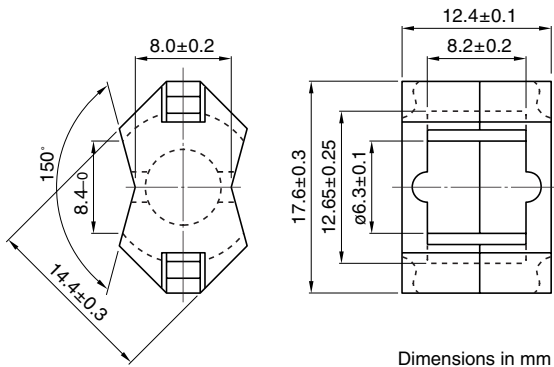


PARAMETER

Core factor	C1	mm ⁻¹	0.781
Effective magnetic path length	ℓ_e	mm	28.6
Effective cross-sectional area	A_e	mm ²	36.6
Effective core volume	V_e	mm ³	1050
Cross-sectional center pole area	A_{cp}	mm ²	31.2
Minimum cross-sectional center pole area	$A_{cp \text{ min.}}$	mm ²	30.2
Cross-sectional winding area of core	A_{cw}	mm ²	26.0
Weight (approx.)		g	5.5

Part No.	AL-value (nH/N ²)	Core loss (W) at 100°C 100kHz, 200mT	Calculated output power (forward converter mode)
PC47RM6Z-12	2450±25% (1kHz, 0.5mA)* 4030 min. (100kHz, 200mT)	0.38 max.	36.2W (100kHz)


* Coil: ø0.26 2UEW 100Ts

NI limit vs. AL-value for PC47RM6 gapped core (Typical)

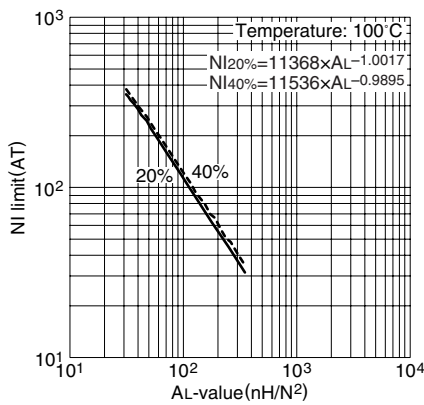

Note: NI limit shows the point where the exciting current is 20% and 40% away from its extended linear part.


AL-value vs. Air gap length for PC47RM6 core (Typical)

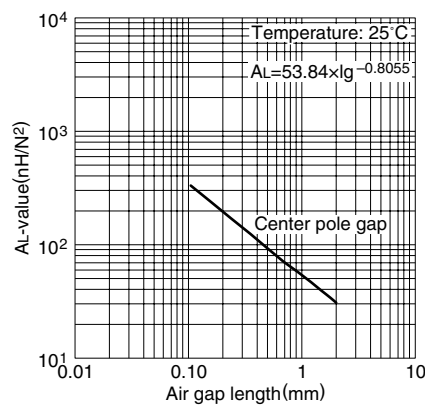


Measuring conditions

- Coil: ø0.26 2UEW 100Ts
- Frequency: 1kHz
- Level: 0.5mA

Temperature rise vs. Total loss for RM6 core (Typical) (Ambient temperature: 25°C)

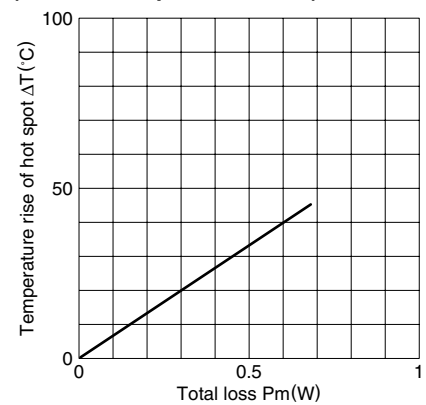


Note: The temperature rise is measured in the room whose temperature and humidity are fixed to 25°C and 45(%)RH, respectively. (approx. 400×300×300cm)



RM Series RM8 Cores

Based on JIS C 2516, IEC Publication 60431 and DIN 41980.

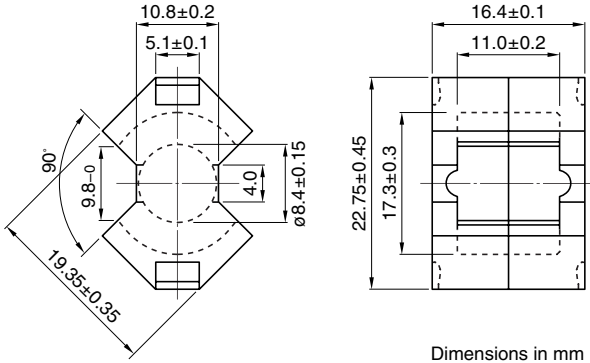


PARAMETER

Core factor	C1	mm ⁻¹	0.594
Effective magnetic path length	ℓ_e	mm	38.0
Effective cross-sectional area	A_e	mm ²	64.0
Effective core volume	V_e	mm ³	2430
Cross-sectional center pole area	A_{cp}	mm ²	55.4
Minimum cross-sectional center pole area	$A_{cp \text{ min.}}$	mm ²	53.5
Cross-sectional winding area of core	A_{cw}	mm ²	48.9
Weight (approx.)		g	13

Part No.	AL-value (nH/N ²)	Core loss (W) at 100°C 100kHz, 200mT	Calculated output power (forward converter mode)
PC47RM8Z-12	1950 min. (1kHz, 0.5mA)* 5290 min. (100kHz, 200mT)	0.91 max.	92.4W (100kHz)


* Coil: ø0.4 2UEW 100Ts

NI limit vs. AL-value for PC47RM8 gapped core (Typical)

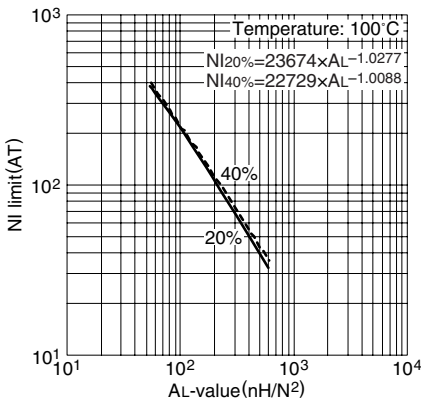

Note: NI limit shows the point where the exciting current is 20% and 40% away from its extended linear part.


AL-value vs. Air gap length for PC47RM8 core (Typical)

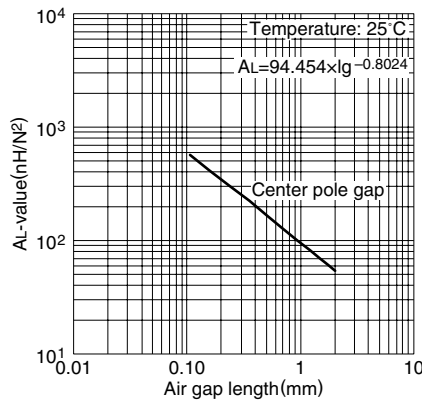


Measuring conditions

- Coil: ø0.4 2UEW 100Ts
- Frequency: 1kHz
- Level: 0.5mA

Temperature rise vs. Total loss for RM8 core (Typical) (Ambient temperature: 25°C)

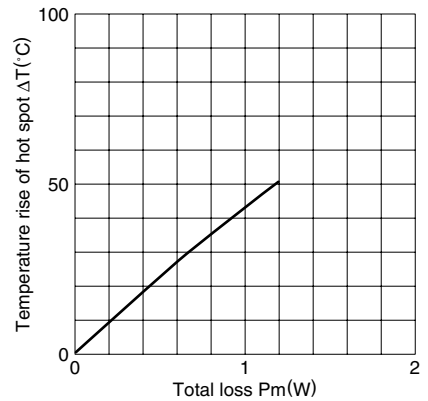


Note: The temperature rise is measured in the room whose temperature and humidity are fixed to 25°C and 45%RH, respectively. (approx. 400×300×300cm)



RM Series RM10 Cores

Based on JIS C 2516, IEC Publication 60431 and DIN 41980.

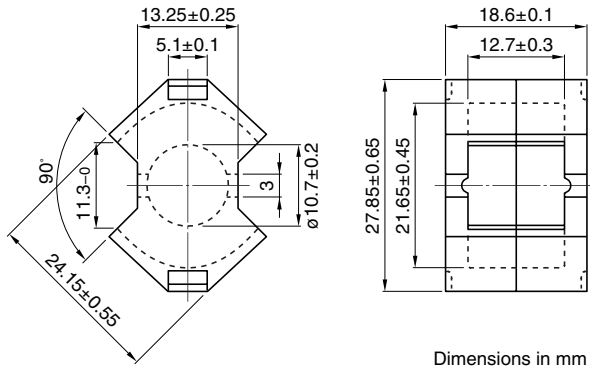


PARAMETER

Core factor	C1	mm ⁻¹	0.450
Effective magnetic path length	ℓ_e	mm	44.0
Effective cross-sectional area	A_e	mm ²	98.0
Effective core volume	V_e	mm ³	4310
Cross-sectional center pole area	A_{cp}	mm ²	89.9
Minimum cross-sectional center pole area	$A_{cp \text{ min.}}$	mm ²	86.6
Cross-sectional winding area of core	A_{cw}	mm ²	69.5
Weight (approx.)		g	23

Part No.	AL-value (nH/N ²)	Core loss (W) at 100°C 100kHz, 200mT	Calculated output power (forward converter mode)
PC47RM10Z-12	4850±25% (1kHz, 0.5mA)* 7000 min. (100kHz, 200mT)	1.70 max.	177.8W (100kHz)


* Coil: ϕ 0.4 2UEW 100Ts

NI limit vs. AL-value for PC47RM10 gapped core (Typical)

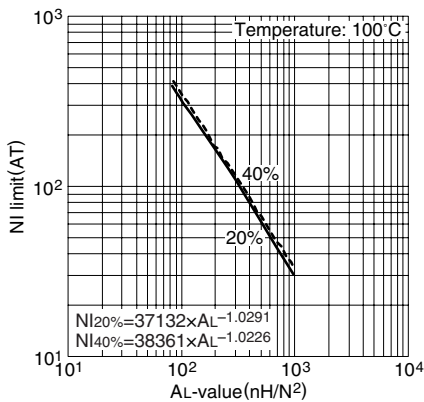

Note: NI limit shows the point where the exciting current is 20% and 40% away from its extended linear part.


AL-value vs. Air gap length for PC47RM10 core (Typical)

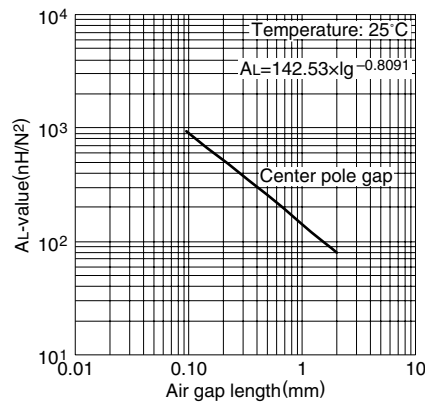


Measuring conditions

- Coil: ϕ 0.4 2UEW 100Ts
- Frequency: 1kHz
- Level: 0.5mA

Temperature rise vs. Total loss for RM10 core (Typical) (Ambient temperature: 25°C)

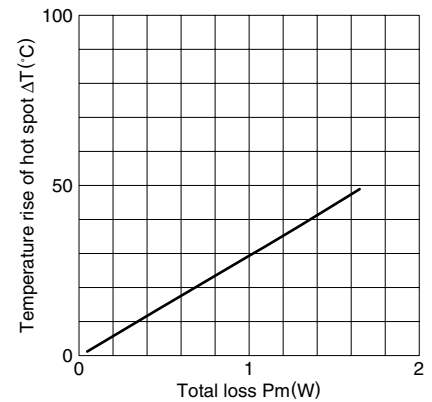


Note: The temperature rise is measured in the room whose temperature and humidity are fixed to 25°C and 45(%)RH, respectively. (approx. 400×300×300cm)



RM Series RM12 Cores

Based on JIS C 2516, IEC Publication 60431.

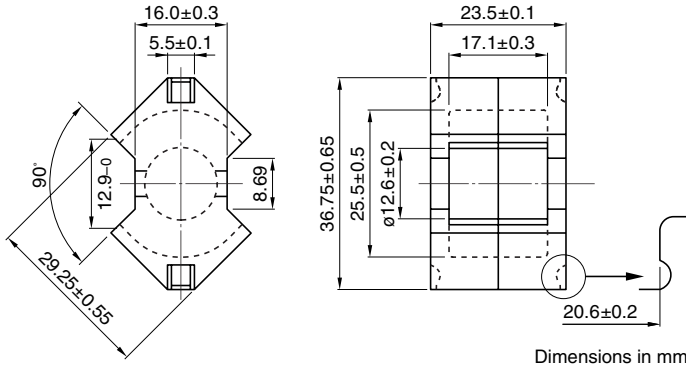


PARAMETER

Core factor	C1	mm ⁻¹	0.406
Effective magnetic path length	ℓ_e	mm	56.9
Effective cross-sectional area	A_e	mm ²	140
Effective core volume	V_e	mm ³	7960
Cross-sectional center pole area	A_{cp}	mm ²	125
Minimum cross-sectional center pole area	$A_{cp \text{ min.}}$	mm ²	121
Cross-sectional winding area of core	A_{cw}	mm ²	110
Weight (approx.)		g	42

Part No.	AL-value (nH/N ²)	Core loss (W) at 100°C 100kHz, 200mT	Calculated output power (forward converter mode)
PC47RM12Z-12	4150 min. (1kHz, 0.5mA)* 9290 min. (100kHz, 200mT)	3.00 max.	466.2W (100kHz)


* Coil: ø0.4 2UEW 100Ts

NI limit vs. AL-value for PC47RM12 gapped core (Typical)

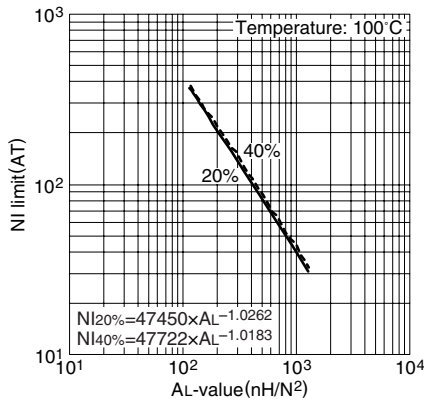


Note: NI limit shows the point where the exciting current is 20% and 40% away from its extended linear part.

AL-value vs. Air gap length for PC47RM12 core (Typical)

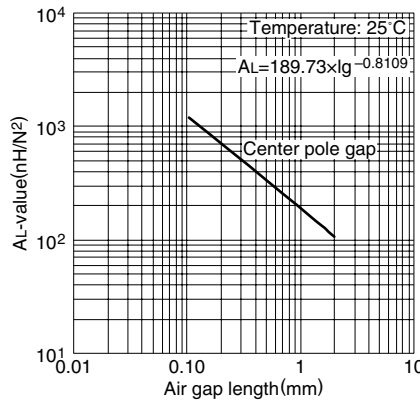


Measuring conditions • Coil: ø0.4 2UEW 100Ts
• Frequency: 1kHz
• Level: 0.5mA

Temperature rise vs. Total loss for RM12 core (Typical) (Ambient temperature: 25°C)

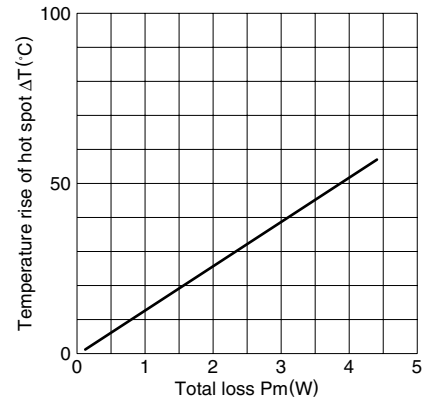


Note: The temperature rise is measured in the room whose temperature and humidity are fixed to 25°C and 45(%)RH, respectively. (approx. 400×300×300cm)



RM Series RM14 Cores

Based on JIS C 2516, IEC Publication 60431 and DIN 41980.

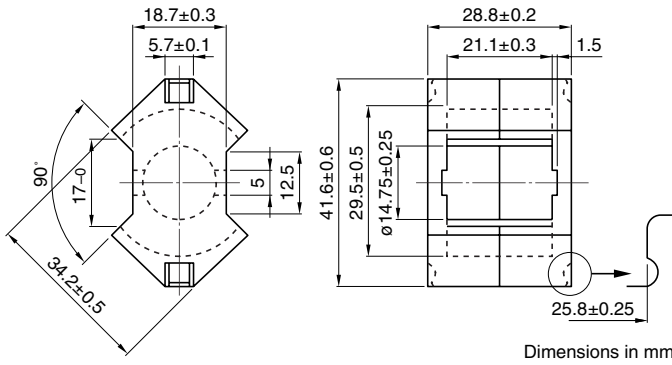


PARAMETER

Core factor	C1	mm ⁻¹	0.393
Effective magnetic path length	ℓ _e	mm	70.0
Effective cross-sectional area	A _e	mm ²	178
Effective core volume	V _e	mm ³	12500
Cross-sectional center pole area	A _{cp}	mm ²	171
Minimum cross-sectional center pole area	A _{cp min.}	mm ²	165
Cross-sectional winding area of core	A _{cw}	mm ²	155
Weight (approx.)		g	70

Part No.	AL-value (nH/N ²)	Core loss (W) at 100°C 100kHz, 200mT	Calculated output power (forward converter mode)
PC47RM14Z-12	4600 min. (1kHz, 0.5mA)* 9590 min. (100kHz, 200mT)	4.60 max.	462.6W (100kHz)


* Coil: ø0.4 2UEW 100Ts

NI limit vs. AL-value for PC47RM14 gapped core (Typical)

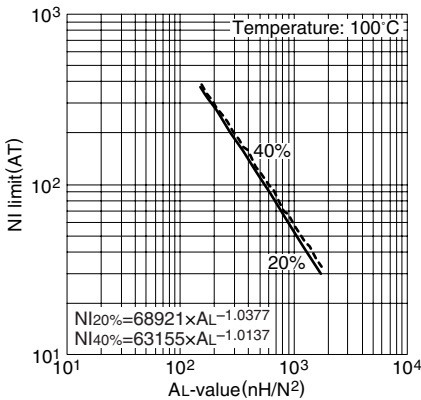


Note: NI limit shows the point where the exciting current is 20% and 40% away from its extended linear part.

AL-value vs. Air gap length for PC47RM14 core (Typical)

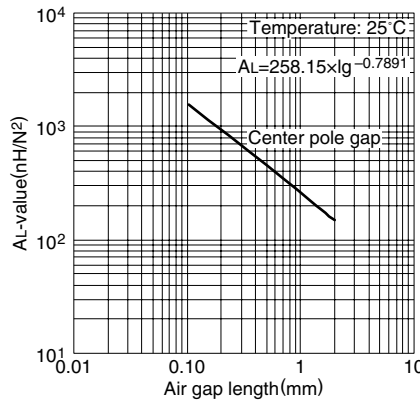

Measuring conditions • Coil: ø0.4 2UEW 100Ts
• Frequency: 1kHz
• Level: 0.5mA

Temperature rise vs. Total loss for RM14 core (Typical)
(Ambient temperature: 25°C)

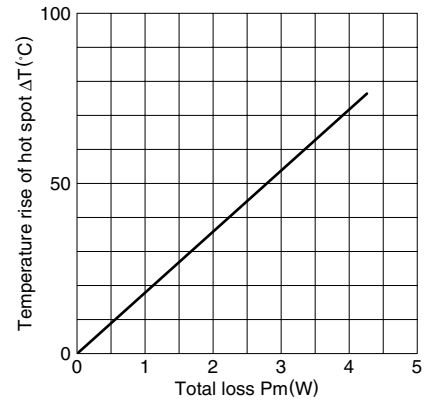

Note: The temperature rise is measured in the room whose temperature and humidity are fixed to 25°C and 45(%)RH, respectively. (approx. 400×300×300cm)

