


## Keratherm Thermal Grease: KP 93

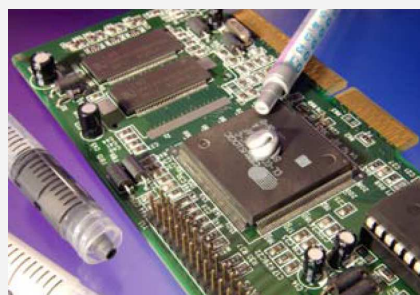

Ceramic-filled single component silicone with a high thermal conductivity.

The non-crosslinked thermal compounds do not dry out.

### APPLICATIONS

- Notebooks
- Desktop CPU's
- Heat Pipes

DISCLAIMER: Purchaser shall be solely responsible for determining the adequacy of the product for any and all uses which the purchaser shall apply the product, and the application of the product by the purchaser shall not be subject to any implied warranty of fitness for that purpose.

Properties	symbol	unit	KP 93
Color			silver
Consistency			soft/paste
<b>Thermal Properties</b>			
Thermal Resistance	$R_{th}$	K/W	0.006
Thermal Conductivity	$\lambda$	W/mK	10.0
<b>Electrical Properties</b>			
Dielectric Breakdown	$E_{d;ac}$	KV/mm	-
<b>Mechanical Properties</b>			
Coating Thickness		mm	0.03 – 0.06
Viscosity		Pas	36
Density		g/cm <sup>3</sup>	1.4
Application Temperature		°C	-60 to +200
<b>Long Term Stability (1000h / 85°C / 85% relative humidity)</b>			
Thermal Resistance	$R_{th}$	K/W	0.006
Total Mass Loss (TML)		Ma.-%	≤ 0.01

The silicone components do not leak out of the compound. Special storage of KP 93 is not required; therefore they can be stored under normal climate conditions for up to 12 months. If any separation of the filler materials becomes evident, KP 93 must be mixed thoroughly before use.

### Comparison of the Thermal Resistance of Different Pastes in Dependence on the Contact Pressure

