


Keratherm – 86/117

Flexible heat conducting and isolating tape
(thickness: 0.200 mm & 0.250 mm)

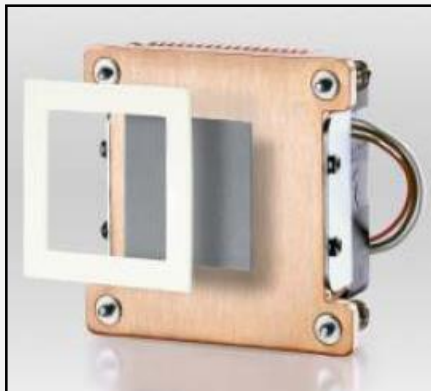

Flexible ceramic heat conducting and isolating tape with defined softening behavior and good electrical isolation.

APPLICATIONS

- Notebooks
- Desktop CPU's
- IGBT Units

DISCLAIMER: Purchaser shall be solely responsible for determining the adequacy of the product for any and all uses which the purchaser shall apply the product, and the application of the product by the purchaser shall not be subject to any implied warranty of fitness for that purpose.

Properties	symbol	unit	86/117
Color			Silver gray
Thermal Properties			
Thermal Resistance	R_{th}	K/W	0.06
Thermal Impedance		$^{\circ}\text{Cmm}^2/\text{W}$	21.9
		Kin^2/W	0.033
Thermal Conductivity	λ	W/mK	3.0
Electrical Properties			
Dielectric Breakdown	$E_{d;ac}$	KV/mm	4.0
Volume Resistivity		Ωcm	3.2×10^{10}
Dielectric Loss Factor (1kHz)	$\tan\Omega$	1	21×10^{-3}
Dielectric Constant (1kHz)		1	3.19
Mechanical Properties			
Thickness ($\pm 10\%$)		Mm	0.250
Hardness		Shore 00	55 – 75
Softening Interval		$^{\circ}\text{C}$	65 - 85
Physical Properties			
Density		g/cm^3	1.20
Application Temperature		$^{\circ}\text{C}$	-40 to +130
Flame Class		UL 94	V-0

The following thicknesses are available: 0.2 mm, 0.25 mm

Note that these new films are special elastomers and do not consist of wax material. Because of their outstanding phase changing characteristics the PCE's or "phase change like" films have the following advantages:

- Very good compressibility thereby very good material adaptability
- Phase-change characteristic without containing wax material
- No melting point but softening interval – no liquidation throughout the whole temperature range
- Electrical insulating
- Excellent reworkability – disassembling without damaging the components
- Can be used for automatic production – easy automatic assembly
- Single-sided adhesive
- RoHS / environmentally friendly
- Also suitable for dispensing