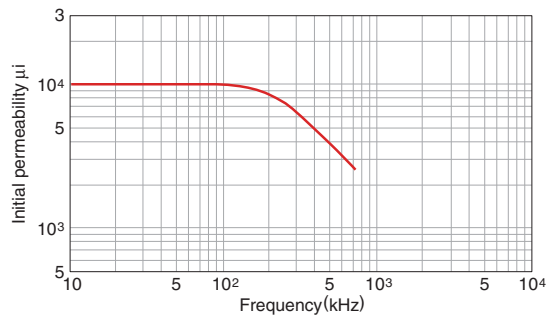
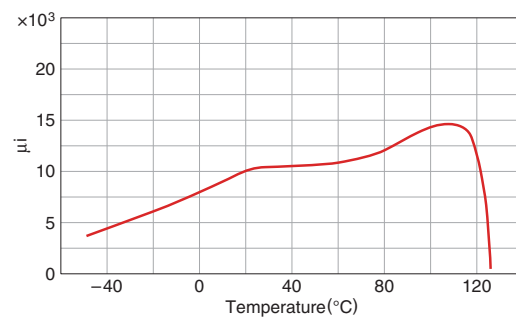


Mn-Zn Ferrite for Telecommunication **Material List of H5C2**


## ■ MATERIAL CHARACTERISTICS

Initial permeability	Relative loss factor	Temperature factor of initial permeability	Saturation magnetic flux density*	Remanent flux density*	Coercive force*	Curie temperature	Hysteresis material constant	Disaccommodation factor	Density*	Electrical resistivity*
$\mu_i$	$\tan\delta/\mu_i$ $\times 10^{-6}$	$\alpha_{\mu i}$ $\times 10^{-6}$ -30 to +20°C 0 to 20°C 20 to 70°C	<b>B<sub>s</sub></b> (mT) H=1194A/m 25°C	<b>B<sub>r</sub></b> (mT) H=1194A/m 25°C	<b>H<sub>c</sub></b> (A/m) H=1194A/m 25°C	<b>T<sub>c</sub></b> (°C)	$\eta B$ $\frac{10^{-6}}{\text{mT}}$	<b>DF</b> $\times 10^{-6}$	<b>db</b> (kg/m <sup>3</sup> ) $\times 10^3$	<b><math>\rho_v</math></b> ( $\Omega \cdot \text{m}$ )
10000±30%	<7.0(10kHz)	-0.5 to 1.5 — -0.5 to 1.5	400	90	7.2	>120	<1.4	<2	4.9	0.15

\* Typ.

□  $\mu_i$  frequency characteristics(Typ.)□  $\mu_i$  temperature characteristics(Typ.)

## □ B-H temperature characteristics(Typ.)

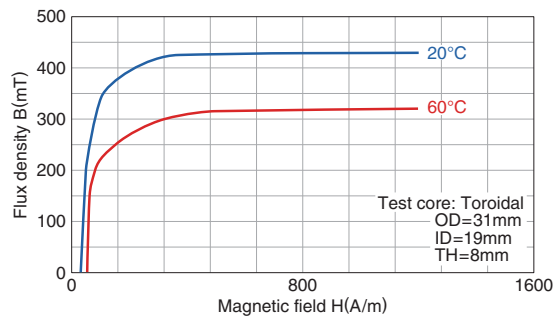□  $\tan\delta/\mu_i$  frequency characteristics(Typ.)