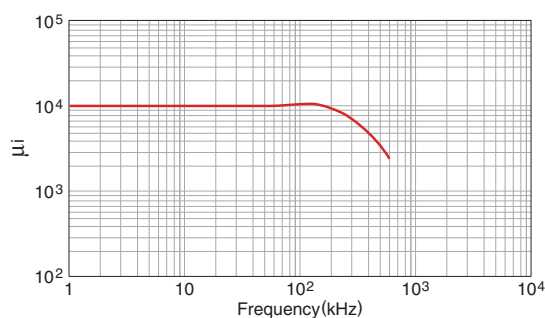
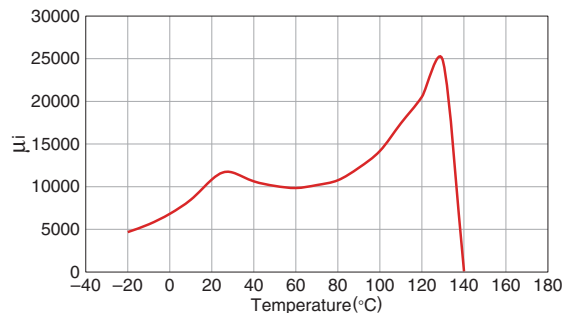


Mn-Zn Ferrite for Switching Power Supplies **Material List of HS10**


■ MATERIAL CHARACTERISTICS

Initial permeability μ_i	Relative loss factor $\tan\delta/\mu_i$ $\times 10^{-6}$	Saturation magnetic flux density* B_s (mT) H=1194A/m 25°C	Remanent flux density* B_r (mT) H=1194A/m 25°C	Coercive force* H_c (A/m) H=1194A/m 25°C	Curie temperature T_c (°C)	Density* d_b (kg/m ³) $\times 10^3$	Electrical resistivity* ρ_V ($\Omega \cdot m$)
10000±25%	30(100kHz)	380	120	5	>120	4.9	0.2

* Typ.

□ μ_i frequency characteristics(Typ.)□ μ_i temperature characteristics(Typ.)

□ B-H temperature characteristics(Typ.)

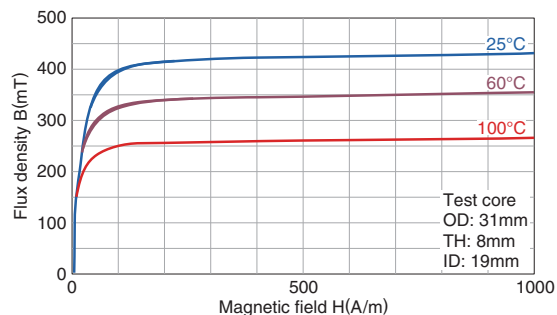□ $\tan\delta/\mu_i$ frequency characteristics(Typ.)